



Office européen des brevets



(11)

EP 0 722 787 A2

(12)

EUROPEAN PATENT APPLICATION

(51) Int. Cl.⁶: **B05D 7/24**, B05D 7/04,
H01G 4/14

(21) Application number: 96200813.2

(22) Date of filing: 04.10.1994

(72) Inventors:
• Shaw, David G.
Tucson, Arizona 85718 (US)

- Dawson, Eric
Tucson, Arizona 85737 (US)
- Cline, Daniel
Tucson, Arizona 85737 (US)
- Langlois, Marc
Tucson, Arizona 85715 (US)

**(74) Representative: Enskat, Michael Antony Frank
Saunders & Dolleymore
9, Rickmansworth Road
Watford Hertfordshire WD1 7HE (GB)**

Remarks:

This application was filed on 26 - 03 - 1996 as a divisional application to the application mentioned under INID code 62.

(54) **Process for making an acrylate coating**

(57) Sheet material is given low oxygen permeability or prepared for winding high voltage capacitors by evaporating polyfunctional acrylate monomer having a molecular rate in the range of from 150 to 600 and condensing the acrylate as a monomer film on a dielectric or thermoplastic substrate. The acrylate is polymerized by irradiation by ultraviolet or electrons. A metallized layer provides an electrode of a capacitor. Electrical contact can be made to the metal layer by Schooping even though the metallized layer is covered by a layer of acrylate. A material selected from the group consisting of silicon oxide, silicon nitride, aluminum nitride, titanium nitride, aluminum oxide and metal may be deposited for forming an oxygen barrier. Adhesion is enhanced by plasma treatment of a surface immediately before deposition. Condensation efficiency is also enhanced by chilling the substrate on which the acrylate is condensed.

EP 0 72 787 A2

Description

This invention relates to deposition of barrier films for inhibiting penetration by oxygen or other gases. It also relates to high-voltage capacitors and the material employed for fabricating such capacitors. Techniques for acrylate deposition and adhesion are also improved.

Many products, including many food products, are packaged in thin plastic sheet bags or the like. The thin films are desirably resistant to permeation by oxygen, water vapor and odorous gases.

Such barrier films are commonly made of costly plastics because less costly films are too permeable to oxygen or water to give a long shelf life. Reduced cost barrier films are highly desirable.

There are many products that are packaged in plastic bottles, tubes or vials which also need protection from oxidation or contamination by environmental gases or which must be in impermeable containers so that components of the contents are not lost by diffusion through the containers.

Electrical capacitors are used for storing energy in a variety of applications. Operating voltages for such devices range from a few volts, such as those used in miniature electronic circuits, to thousands of volts, such as those used in power utility applications.

For low and medium voltages (generally below 600 volts) metallized sheet dielectrics are commonly used. Higher voltage capacitors are generally constructed of aluminum foil electrodes and sheet dielectric material such as a thermoplastic polypropylene and polyester film. Capacitors intended for service at more than about 600 volts are completely impregnated with a dielectric liquid with good gas absorbing properties. Typical dielectric liquids with good gas absorbing properties are PXE (phenyl xylol ethane), MIPB (mono isopropyl biphenyl), DOP (dioctyl phthalate), castor oil, polypropylene glycol and mineral oil.

High voltage capacitors have not been able to take advantage of the self healing properties of metallized electrodes. The dielectric liquid causes swelling of the thermoplastic sheets, which causes cracking of the thin film metal electrode and an open circuit quickly develops. It would be desirable to have wound capacitors made with metallized film for higher voltages where self healing can occur, and often where it is necessary that the capacitor be liquid filled.

There is, therefore, a method for forming a substrate coated with an acrylate layer wherein the substrate is first chilled to a temperature below ambient temperature outside of a deposition station. The chilled substrate is passed through a deposition station while the substrate is still at a temperature below ambient temperature. At the deposition station an acrylate monomer having average molecular weight in the range of from 150 to 600 is evaporated and condensed on the substrate as an acrylate film. The acrylate monomer film is polymerized for forming a polymerized acrylate layer.

Metallized capacitor electrodes may be protected from damage by corrosion or by dielectric liquids by applying coatings of resistant polymers on one or both faces of the dielectric. Thus, there is a sheet material suitable for winding a metallized sheet capacitor employing as a substrate a thermoplastic dielectric sheet. A conductive metal layer is deposited on at least one face of the dielectric sheet. One layer of polymerized acrylate is formed on the same face of the dielectric sheet as the conductive layer, and another layer of polymerized acrylate may be formed on the opposite face of the dielectric sheet.

A wound capacitor can be made from at least one thermoplastic dielectric sheet wound into a cylinder where there is a metallized conductive layer deposited on at least one face of the dielectric sheet. A layer of crosslinked acrylate is in direct contact with the entire metallized layer and electrical contact is made to the conductive layer at an end of the cylinder by Schooping.

FIG. 1 illustrates schematically a metallized sheet capacitor constructed according to principles of this invention.

FIG. 2 illustrates in three transverse cross sections materials suitable for winding a capacitor, FIG. 2a illustrating two coated sheets as used in a capacitor, FIG. 2b illustrating a sheet coated on only one face, and FIG. 2c illustrating a sheet with the coating sequence reversed.

FIGs. 3, 4 and 5 illustrate, in fragmentary transverse cross section, other embodiments of material suitable for winding capacitors.

FIG. 6 is a schematic illustration of coating apparatus for forming such a capacitor sheet material.

FIG. 7 is a graph with the axes representing acrylate shrinkage and layer thickness, respectively.

FIG. 8 is a graph illustrating condensation efficiency as a function of temperature.

FIG. 9 is a fragmentary cross section of a capacitor made with metallized sheet coated with a polymerized acrylate.

FIG. 10 illustrates in transverse cross section a coated polypropylene with low oxygen permeability.

FIG. 11 illustrates in transverse cross section a coated thermoplastic substrate with low oxygen permeability.

FIG. 12 illustrates an exemplary container constructed according to principles of this invention.

FIG. 13 is a schematic illustration of apparatus for coating substrates by spraying.

FIG. 14 is a schematic illustration of coating apparatus for forming a barrier sheet material.

An exemplary capacitor 10 comprises a can 11, the end of which is cut away in FIG. 1 to show the roll of capacitor material 12 inside the can. The layers of material forming the capacitor are wound into a cylindrical roll. In effect, the roll of capacitor material comprises alternating layers of metal and dielectric coiled in a tight

spiral. The metal layers form the electrodes of the capacitor and the dielectric material between the electrodes permits accumulation of charge in the capacitor. Such a capacitor, intended for use at higher voltages, may be filled with a dielectric liquid such as those men-

FIG. 2 illustrates in three fragmentary transverse cross sections exemplary materials for winding such a capacitor. A sheet suitable for winding a capacitor has a thermoplastic substrate 13 such as thin polypropylene or polyester sheet which has a stable dielectric constant and high dielectric strength. A layer of metal 14 which may be vacuum deposited or sputtered is formed on at least one face of the substrate. A layer of polymerized acrylate 16 is deposited either over or under the metal layer as described hereinafter. In the embodiment illustrated in FIG. 2a, another layer of polymerized acrylate 17 is formed on the opposite face of the substrate.

The two sheets of material suitable for forming a capacitor are illustrated in FIG. 2a as they are sometimes used in capacitors. Each sheet has a portion of the metallized layer 14 exposed along an edge of the sheet. That is, a portion of the metallized layer is not covered by an insulating layer of acrylate in this embodiment. These exposed edges of the metal layer are at opposite edges of adjacent sheets in the capacitor and provide an area to which electrical contact can be made so that alternate sheets of the capacitor material form the opposite plates of the capacitor.

FIG. 2b illustrates another embodiment of sheet for forming a rolled capacitor. Here a layer of metal 14 is deposited on the substrate 13 and a layer of polymerized acrylate 16 is formed over the metal layer. The entire metal layer is covered with acrylate. Only one face of the substrate has a coating of acrylate.

The embodiment illustrated in FIG. 2c reverses the layers on the substrate. In this embodiment there is a layer of polymerized acrylate 16 formed directly on the substrate 13. In direct contact with and over the acrylate layer is a deposited layer of metal 14. Again, there is no acrylate layer on the opposite face of the substrate. The metal may extend all the way to each edge of the sheet or may be spaced a short distance from the edge of the sheet along one edge.

FIG. 3 illustrates a variation of the capacitor material having a layer of polymerized acrylate 18 on each face of a thermoplastic substrate 19. A layer of metal 21 is deposited on top of one of the acrylate layers.

FIG. 4 illustrates another slight variation from an embodiment as illustrated in FIG. 3, having a layer of polymerized acrylate 22 on each face of a substrate 23. A layer of metal 24 is deposited over at least one of the acrylate layers. A third layer of polymerized acrylate 26 is formed over the layer of metal. Any of these variations may be used for forming capacitors.

It is not always required that a capacitor be formed by winding the sheets of material. A capacitor may have one electrode formed on a ther-

moplastic substrate 27. A layer of polymerized acrylate 28 is formed on each face of the substrate. A layer of metal 29 is deposited for forming the one electrode. The other electrode in such a capacitor comprises a sheet of aluminum foil 31. That electrode may be separated from an adjacent layer of metal (not shown) on another substrate via a sheet 32 of dielectric materials such as polypropylene.

As mentioned above, the polypropylene and polyester materials are desirable as dielectrics for capacitors since they have a stable dielectric constant and high dielectric strength. If a metallized polypropylene, for example, is tried in a liquid filled capacitor, the thermoplastic apparently swells and ruptures the thin metallized layer. By having a very thin layer of polymerized acrylate in direct contact with the metallized electrode, the damage caused by dielectric liquid can be avoided. It is believed that the thermoset acrylate supports or stabilizes the metal film and prevents cracking despite swelling of the film substrate.

If the acrylate layer is over the metal layer, it protects the metal layer from corrosion. Although it does not appear to be necessary for forming certain capacitors, if both faces of the dielectric sheet are coated with a layer of cured acrylate, the polymer film between the layers is isolated from dielectric liquid in a capacitor, and swelling is avoided.

An exemplary barrier material as illustrated in FIG. 11 comprises a thermoplastic substrate 110 having a cross-linked acrylate layer 111 on one face. The acrylate layer is overlain by a layer 112 of oxygen barrier material. A final cross-linked acrylate layer 113 is optionally formed over the oxygen barrier layer.

It has been discovered that polyethylene, polypropylene, polyester or nylon substrates with thin surface coatings of crosslinked acrylate have very low oxygen and water permeability when combined with a metal or inorganic barrier coating. Typical sheets for packaging foodstuffs include metallized polypropylene, nylon or polyester sheet. Metallized nylon has an oxygen permeability of about 0.05 ml/100 in²/hour (ml/645 cm²/hour) as measured with a Mocon Oxtran System available from Modern Controls, Minneapolis, Minnesota. Metallized polyester has a typical oxygen permeability of about 0.08. Metallized polypropylene, on the other hand, has an oxygen permeability of about 2.5 and is not usually suitable for packaging where low oxygen permeability is important.

It is believed that the high oxygen permeability of metallized polypropylene is due to the inherent surface roughness of the polypropylene sheet. Nylon and polyester sheets are considerably smoother and have a higher temperature capability than polypropylene. A metal coating of uniform thickness can be readily applied as a good oxygen barrier. A layer of acrylate

Sheet polypropylene without any coating may have an oxygen permeability of about 100. However, if a layer of aluminum is applied to a surface of a polypropylene sheet substrate, the oxygen permeability decreases to about 2.5. Surprisingly, when an acrylate layer only about one micrometer thick is formed on the polypropylene and then covered with a layer of metal, the oxygen permeability drops to about 0.05, a value lower than metallized polyester. It is hypothesized that the film of liquid acrylate monomer deposited on the surface of the polypropylene has a smooth, high temperature surface and the surface remains smooth when the acrylate is polymerized. The metallized layer can then form a good oxygen barrier.

First, a layer of acrylate monomer is deposited on the substrate and crosslinked. The acrylate layer is then coated with an oxygen barrier layer of SiO_x , or Al_2O_3 , both of which have good resistance to oxygen permeability. The high temperature resistance of the crosslinked acrylate layer permits the notably higher temperature deposition of silicon oxide or aluminum oxide on the thermoplastic substrate. Other deposited barrier films may be formed of nitrides or silicides that can be vacuum or vapor deposited. For example, silicon nitride, aluminum nitride, or titanium nitride may be used. The materials need not be stoichiometric compounds and often are substoichiometric with excess metal.

A still greater surprise occurs when another polymerized acrylate layer is formed over the oxygen barrier layer. The permeability through a polypropylene barrier material drops to about 0.002 which is appreciably better than the oxygen permeability of metallized nylon. It is hypothesized that the second acrylate layer may protect the metallized layer and assure retention of the oxygen barrier properties of the metal.

A preferred composite material with low oxygen permeability has a layer of polymerized acrylate, a layer of barrier material such as SiO_x , Al_2O_3 , silicon nitride, titanium nitride or aluminum nitride and another layer of polymerized acrylate on a thermoplastic substrate. The layers of acrylate reduce permeability dramatically and the layer overlying the barrier material protects the barrier material from mechanical damage and also provides a surface suitable for printing.

The substantial improvement in oxygen permeability is believed to be attributable to formation of a liquid film of monomer on the surface of the polypropylene, followed by cross linking of the polyfunctional acrylate. Adding a second layer of acrylate monomer which is polymerized in situ is believed to rectify any defects in the underlying layers and provide an additional thickness of material with inherently low oxygen permeability. Redundant layers minimize pinhole leakage.

A particularly useful barrier sheet may be formed with multiple layers of acrylate and oxygen barrier. Several thin layers of such materials are more effective than a couple thicker layers with the same total thickness. For example, a sheet may be coated with a layer of

cross linked acrylate about 0.5 micrometers thick followed by a layer of metal or other oxygen barrier about 0.1 micrometer thick. Subsequent layers of acrylate and metal are built up, preferably with the final layer being acrylate. The thin layers of acrylate between layers of metal reduce the lateral flow of oxygen in the layers and minimize permeability. Such an arrangement is particularly useful as an oxygen barrier on bottles or vials.

Although it is generally preferred to deposit a layer of acrylate on the substrate, followed by a layer of oxygen barrier material, oxygen permeability can be sharply reduced with a layer of metal deposited directly on the substrate, followed by a layer of acrylate.

The polymerized acrylate layer is believed to be beneficial for a number of other reasons. As a thermoset material, it has higher temperature resistance than the thermoplastic substrate. In the coating process, the product is subjected to elevated temperature processing such as metallizing, plasma treatment and the like. A cured acrylate coating would not have vapor emissions and may seal the surface and inhibit emission of materials from a thermoplastic substrate.

It is particularly preferred to vaporize an acrylate prepolymer and deposit it on a substrate in a vacuum system since this technique serves to refine the acrylate. In effect, the vaporization and deposition process is a vacuum distillation which removes volatiles to the vacuum pumps and deposits only higher molecular weight acrylates on the substrate. Removal of volatiles is desirable for subsequent high temperature processing of the material such as in deposition of metal or other inorganic barrier films.

After any of these deposition techniques, the monomer film is irradiated with ultraviolet or an electron beam to cause polymerization of the acrylate to form a monolithic crosslinked layer. Polymerization by irradiation is a conventional practice and the electron flux required or wavelength and total flux of ultraviolet used are commonly known. A photoinitiator may be included in the acrylate for facilitating polymerization by ultraviolet radiation.

A suitable apparatus for coating the substrate with acrylate and metal layers is illustrated schematically in FIG. 6. All of the coating equipment is positioned in a conventional vacuum chamber 36. A roll of polypropylene, polyester or nylon sheet is mounted on a pay-out reel 37. The sheet 38 forming the substrate is wrapped around a first rotatable drum 39, around a second rotatable drum 40, and fed to a take-up reel 41. Idler rolls 42 are employed, as appropriate, for guiding the sheet material from the payout reel to the drums and to the take-up reel.

A flash evaporator 43 is mounted in proximity to the drum at a first coating station. The flash evaporator deposits a layer or film of acrylate monomer on the substrate sheet as it travels around the drum. After being coated with acrylate monomer the substrate sheet passes an irradiation station where the acrylate is irradiated by a source 44 such as an electron gun or source

of ultraviolet radiation. The radiation or electron bombardment of the film induces polymerization of the acrylate monomer.

The sheet then passes a metallization station 46 where a coating of metal for an electrode is applied by vacuum metallizing or sputtering. The sheet then passes another flash evaporator 47 where another layer of acrylate monomer is deposited for forming a protective layer over the metal. This layer of monomer is cured by irradiation from an ultraviolet or electron beam source 48 adjacent the drum. Depending on whether a layer of acrylate is above or below the metal layer, either of the evaporators 43 or 47 may be used. Clearly, if the metal layer is to be sandwiched between layers of acrylate, both evaporators and their respective radiation sources are used.

An exemplary process for coating a container can be described as follows. The container is injection molded or blow molded in a conventional manner from a conventional thermoplastic material. Preferably the container is then flame treated for activating and smoothing the surface. It has been found that adhesion of an acrylate layer on the substrate is enhanced by activating the surface by plasma or flame treating. High temperature air may also be used.

In a typical production line, a row of containers 114 are moved successively through a flame treating station, a coating station and a curing station. In the flame treating station, the containers are bathed in the flames from a plurality of propane or natural gas torches 116. In addition to activating the surface for enhanced adhesion, the flame treating can significantly smooth the surface of the container to assure that there is complete coverage by subsequent coatings. The flame is applied to the surface with sufficient intensity to soften or melt a thin surface layer on the container.

The flame treatment melts and rounds off any molding flash and smooths mold marks on the container so that the coating can bridge surface irregularities. "Melting" may almost be considered a misnomer since the thermoplastic materials are effectively supercooled liquids. Thus, melting is considered to be sufficient softening of the surface for smoothing irregularities.

Such an acrylate layer is applied in a coating station where one or more nozzles 17 spray a thin coating of acrylate monomer onto the surface. Such a sprayed coating may be in the order of from one to twenty micrometers thick, for example. The acrylate sprayed onto the surface may be a low viscosity monomer or if desired, a monomer and/or a low molecular weight polymer may be combined with a solvent for spraying. In the event the acrylate is to be cross-linked by ultraviolet irradiation, a photoinitiator may be included in the sprayed composition.

An alternative to spraying the surface of the container with acrylate comprises dipping the container into

Following the coating station, the containers pass a curing station where a plurality of ultraviolet lamps 18 irradiate the acrylate layer and cause cross-linking.

Following the application of an acrylate layer to the containers, an oxygen barrier layer is applied. Preferably this is by deposition in a vacuum chamber. A metal barrier layer, e.g. aluminum, may be applied by vacuum metallizing or sputtering. A layer of silicon oxide, aluminum oxide, silicon nitride or other such material may be deposited by a plasma assisted chemical vapor deposition technique. For example, SiO_x may be deposited by a plasma vapor deposition process using an oxidizing or inert carrier gas. Aluminum oxide can be deposited by electron beam evaporation or preferably by evaporation of aluminum which is converted to an oxide in an oxygen plasma.

An alternative technique for depositing an acrylate layer is in a vacuum chamber. Suitable apparatus for coating a sheet substrate with acrylate and oxygen barrier layers is illustrated schematically in FIG. 14. All of the coating equipment is positioned in a conventional vacuum chamber 121. A roll of polypropylene, polyester or nylon sheet is mounted on a pay-out reel 122. The sheet 123 forming the substrate is wrapped around a rotatable drum 124 and fed to a take-up reel 126. Idler rolls 127 are employed, as appropriate, for guiding the sheet material from the payout reel to the drum and to the take-up reel.

A flash evaporator 128 is mounted in proximity to the drum at a first coating station. The flash evaporator deposits a layer or film of acrylate monomer on the substrate sheet as it travels around the drum. After being coated with acrylate monomer the substrate sheet passes an irradiation station where the acrylate is irradiated by a source 129 such as an electron gun or source of ultraviolet radiation. The UV radiation or electron bombardment of the film induces polymerization of the acrylate monomer.

The sheet then passes a deposition station 131 where a coating of oxygen barrier material is applied by plasma deposition, vacuum deposition or the like. The sheet then passes another flash evaporator 132 where another layer of acrylate monomer is deposited for forming a protective layer over the oxygen barrier. This layer of monomer is cured by irradiation from an ultraviolet or electron beam source 133 adjacent the drum. The coated sheet is then wrapped up on the take-up reel 126.

Evaporation of the monomer is preferably from flash evaporation apparatus 129, 132 as described in U.S. Patents Nos. 4,722,515, 4,696,719, 4,842,893, 4,954,371 and/or 5,097,800. These patents also describe polymerization of acrylate by radiation. In such flash evaporation apparatus, liquid acrylate monomer is injected into a heated chamber as droplets. The electric field is applied to the liquid monomer droplets to cause them to evaporate. A flow of carrier gas is directed through which the monomer vapor flows.

Two styles of evaporator are suitable. In one of them, the orifice for injecting droplets and flash evaporator are connected to one end of the nozzle cylinder. In the other style, the injector and flash evaporator section is attached in the center of the nozzle chamber like a T.

It is often found desirable to plasma treat the surface to be coated immediately before coating. A conventional plasma gun 134 is positioned in the vacuum chamber upstream from each of the flash evaporators 128 and 132 for activating the surface of the sheet on a continuous basis before monomer deposition. Conventional plasma generators are used.

Surface treatment within the vacuum chamber is of substantial importance for all surfaces, not just the surface of the raw film. Referring again to FIG. 6, a conventional plasma gun 52 is positioned in the vacuum chamber upstream from each of the flash evaporators 43 and 49 for activating the surface of the sheet on a continuous basis before monomer deposition. Another plasma gun 52 is provided immediately before the vacuum metallizing station 46. Conventional plasma generators are used.

In an exemplary embodiment the plasma generator is operated at a voltage of about 500 to 1000 volts with a frequency of about 50 KHz. Power levels are in the order of 500 to 3000 watts. For an exemplary 50 cm wide film traveling at a rate of 30 to 90 meters per minute, around 500 watts appears appropriate.

An analogous system may be employed for coating containers with layers of acrylate and barrier material. The containers are moved successively through an acrylate evaporation and condensation station and a deposition station. If two layers of acrylate are used the second acrylate may be applied by way of the same flash evaporator or by way of a second similar flash evaporator.

The acrylates used for forming the cross-linked coatings on the thermoplastic substrate differ somewhat depending on the technique used for depositing the coating. The acrylates used for dipping or spraying are similar and it is not necessary that the acrylate is a monomer. Generally, the acrylates used are blends of high and low molecular weight materials to yield the desired viscosity of the composition for dipping or spraying. Monomers with molecular weights in the order of 150 up to partially polymerized materials have a molecular weights in the order of 20,000 may be blended to obtain a low viscosity blend. There should be polyfunctional acrylates in the blend so that there is extensive cross-linking.

In the event the acrylate layers are applied by the evaporation and condensation technique, the range of suitable acrylates is more restricted. These acrylate resins are generally monomers having a molecular weight in the range of from 150 to 600. Preferably, the monomers have a molecular weight in the range of from 200 to 400. Higher molecular weight fluorinated acrylates or methacrylates may be equivalent to these lower molecular weight materials and also be used for

forming a deposited acrylate layer. For example, a fluorinated acrylate with a molecular weight of about 2000 evaporates and condenses similar to a non-fluorinated acrylate having a molecular weight in the order of 300. The acceptable range of molecular weights for fluorinated acrylates is about 400 to 3000. Fluorinated acrylates include monoacrylates, diacrylates, and methacrylates. Chlorinated acrylates may also be useful.

If the molecular weight is below about 150, the monomer is too volatile and does not condense well for forming a monomer film. If the molecular weight is more than about 600 the monomer does not evaporate readily in the flash evaporator at temperatures safely below the decomposition temperature of the monomer.

When the monomers polymerize, there may be shrinkage of the film. Excessive shrinkage may cause poor adhesion of the layer on the substrate. Shrinkage up to about 15 to 20% can be tolerated in the thin acrylate layers. However, it is preferred that the shrinkage be less than 10% for reliable coating adhesion.

A typical monomer used for flash evaporation includes an appreciable amount of diacrylate and/or triacrylate to promote crosslinking. Blends of acrylates may be employed for obtaining desired evaporation and condensation characteristics and adhesion, and for controlled shrinkage of the deposited film during polymerization.

Suitable monomers are those that can be flash evaporated in a vacuum chamber at a temperature below the thermal decomposition temperature of the monomer and below a temperature at which polymerization occurs in less than a few seconds at the evaporation temperature. The monomers selected should also be readily capable of crosslinking when exposed to ultraviolet or electron beam radiation.

The monomer composition may comprise a mixture of monoacrylates and diacrylates. Triacrylates tend to be reactive and may polymerize at the evaporation temperatures. Generally speaking, shrinkage is reduced with higher molecular weight materials.

Generally, it is desirable that at least a major portion of the acrylate monomer evaporated is a polyfunctional acrylate for crosslinking. Preferably, the acrylate comprises at least 70 percent polyfunctional acrylates such as diacrylate or triacrylate. If the degree of crosslinking is too low, the polymerized acrylate layer may not have adequate cure speed.

There are situations when less than half of the acrylate monomer comprises polyfunctional acrylates. For example, in a dry capacitor film one composition comprises about 80% monoacrylate and 20% diacrylate. The high proportion of monoacrylate is used since it has a high dielectric constant.

Preferably, the molecular weight of the acrylate monomer is in the range of from 200 to 400. If the molecular weight is less than about 200, the monomer evaporates readily, but may not condense quantitatively on the substrate without chilling of the substrate. If the

molecular weight is more than about 400, the monomers become increasingly difficult to evaporate and higher evaporation temperatures are required.

Preferably, the acrylate monomer has a vapor pressure at 25°C in the range of from 1 to 20 micrometers of mercury. If the vapor pressure is less than about one micrometer, exceptionally high temperatures may be required to evaporate sufficient material for forming a coating on the substrate in reasonable coating time. High temperatures may lead to thermal decomposition or premature curing of the monomers. If the vapor pressure is higher than about twenty micrometers of mercury, condensation of the monomer to form a film on the substrate may have too low an efficiency for practical coating operations. Adequate efficiency may not be obtained until the surface of the substrate is cooled below the freezing point of the monomer, in which case the material may not polymerize properly.

There are at least five monoacrylates, ten diacrylates, ten to fifteen triacrylates and two or three tetraacrylates which may be included in the evaporated composition. Most preferably the acrylate comprises hexane diol diacrylate (HDDA) with a molecular weight of 226 and/or tripropylene glycol diacrylate (TRPGDA) with a molecular weight of about 300. Other acrylates may be used, sometimes in combination, such as monoacrylates 2-phenoxy ethyl acrylate (M.W. 192), isobornyl acrylate (M.W. 208) and lauryl acrylate (M.W. 240), epoxy acrylate RDX80095 made by Radcure of Atlanta, Georgia; diacrylates diethylene glycol diacrylate (M.W. 214), neopentyl glycol diacrylate (M.W. 212), propoxylated neopentyl glycol diacrylate (M.W. 328) and polyethylene glycol diacrylate, tetraethylene glycol diacrylate (M.W. 302), and bisphenol A epoxy diacrylate; and triacrylates trimethylol propane triacrylate (M.W. 296), ethoxylated trimethylol propane triacrylate (M.W. 428), propylated trimethylol propane triacrylate (M.W. 470) and pentaerythritol triacrylate (M.W. 298). Monomethacrylates isobornyl methacrylate (M.W. 222) and 2-phenoxyethyl methacrylate (M.W. 206) and dimethacrylates triethylene glycol dimethacrylate (M.W. 286) and 1,6-hexanediol dimethacrylate (M.W. 254) may also be useful, but may cure too slowly to be useful for high speed coating operations.

It has generally been considered that it is not feasible to evaporate high molecular weight acrylates because of their very low vapor pressure and high viscosity. Evaporated acrylate coatings have been restricted to low molecular weight monomers, generally below a molecular weight of about 400 and with low viscosity. Generally the viscosities are below 50 centistoke.

It has been found, however, that by mixing a very low and a very high viscosity material, flash evaporation, condensation and curing can be obtained. For example, a mixture of 70 percent tripropylene glycol diacrylate (TRPGDA) and 30 percent of hexane diol diacrylate (HDDA) can be flash evaporated. The low viscosity component lowers the viscosity of the

blend, which improves atomization in the evaporator and assists in the flash evaporation of the high viscosity acrylate.

When blends of high and low molecular weight acrylates are used, it is preferred that the weighted average molecular weight of the blend be in the range of from 200 to 600 and preferably up to about 400. This assures that there is good vaporization of the blend at reasonable temperatures in the evaporator.

Some examples of low molecular weight acrylates are hexane diol diacrylate, diethylene glycol diacrylate, propane diacrylate, butane diol diacrylate, tripropylene glycol diacrylate, neopentyl glycol diacrylate, phenoxyethyl acrylate, isobornyl acrylate and lauryl acrylate. Some examples of high molecular weight acrylates are bisphenol A diacrylate, BCEA, Radcure 7100 (an amine acrylate available from Radcure, Atlanta Georgia), Radcure 169, Radcure 170, acrylated and methacrylated phosphoric acid, Henkel 4770 (an amine acrylate available from Henkel Corporation, Ambler, Pennsylvania) and glycerol propoxy triacrylate.

Particularly preferred high molecular weight materials include BCEA which is acid in character and has a shrinkage of only about 4 percent upon curing. Another suitable material is an acrylate or methacrylate of phosphoric acid. One can also use acrylic acid in the composition, along with dimers, trimers and tetramers of acidic acrylates or methacrylates. The molecular weight range of the acrylate may be extended by preheating the prepolymer before it is atomized into the vaporization chamber.

It has been found that the temperature of the substrate on which the monomer film is deposited can have a large influence on the efficiency of condensation. It is desirable to refrigerate the substrate before it is placed in the vacuum chamber. Good condensation efficiency can be obtained with monomers having a molecular weight of at least 200 with the substrate cooled to temperatures in the range from 0 to 15°C. A rack of containers to be coated can be removed from a refrigerator and placed in a vacuum chamber, pumped down and coated before the containers warm to unreasonably high temperatures.

It is also desirable to cool the rotating drums so that the substrate remains at a low temperature. When the sheet being coated is smooth and thin (generally less than 12 micrometers) good condensation efficiency can be obtained with monomers having a molecular weight of at least 200 with the coating drum cooled to temperatures in the range from 0 to 15°C.

Fig. 8 includes a series of data points showing measured condensation efficiencies of hexane diol diacrylate monomer as a function of the substrate temperature. HDDA is a relatively volatile monomer with a molecular weight about 212. A less volatile monomer such as tripropylene glycol diacrylate (TRPGDA) with a molecular weight about 300 can be used in combination with HDDA to avoid the problem of coating of the substrate, if it can be avoided. For example, HDDA freezes on the

substrate when the coating drum temperature is below about 0°C. The frozen monomer cannot be polymerized. Thus, the cooling temperature must hold the surface of the substrate above the freezing point of the monomer but below the temperature at which the condensation efficiency decreases significantly.

As an alternative to or in addition to precooling the roll of substrate the sheet can be cooled on the front surface preceding the evaporator. For example, the idler roll 42 between the payout reel and the first drum may be chilled for cooling the front surface of the substrate sheet before it reaches the first drum. Cooling the front face of the sheet, i.e. the face on which deposition is to occur can permit faster processing and permits cooling of sheets with a rough reverse surface.

Precooling of a sheet of material on which the acrylate is to be deposited can be significant for applications in addition to preparation of sheet material for winding capacitors. For example, there are times that it is desirable to coat paper with an acrylate and the rough surface of paper does not lend itself to cooling from the back surface on a rotating drum. In such a case, the flexible paper may be passed over a chilled roll to cool the front face of the paper. An acrylate is then deposited on the same face of the paper as was just cooled before the face heats any significant amount.

There may be embodiments where it is sufficient to deposit an oxygen barrier layer directly on the substrate and apply an acrylate layer over the oxygen barrier material. For example, when the thermoplastic substrate has been flame treated to smooth the surface sufficiently that a thin oxygen barrier material can bridge over any surface irregularities, the oxygen barrier material may be deposited directly on the flame treated substrate. An acrylate layer may then be applied over the oxygen barrier material to protect the barrier and further reduce permeability.

It is found particularly desirable to provide a protective crosslinked acrylate coating over a deposited layer of metal such as aluminum. If an aluminum layer is applied to a sheet substrate which is rolled for later use or which is passed over a roller contacting the surface, the aluminum may be abraded off of higher asperities on the surface. A sheet coated with aluminum and protected with an overlying crosslinked acrylate coating having a thickness of as little as 0.1 micrometer, the pin-hole density can be maintained as low as 10 pinholes per cm².

When films used in packaging food products, cigarettes or many other items, the presence of an acrylate odor is unacceptable. Any such odor can be eliminated by curing any residual acrylate monomer on the film before it is removed from the vacuum chamber.

An electron gun 53 is mounted in the vacuum chamber between the final idler roll 42 and the take-up reel 41. Electron bombardment from the gun polymerizes any residual acrylate monomer on the surfaces of the film before it is rolled up. By irradiating in the converging space between the film on the take-up reel and

the film advancing from the idler roll both faces of the film can be irradiated with a single electron gun.

A sheet capacitor is often constructed by winding two sheets of metallized plastic sheet together, with the metallized layer on one sheet being one electrode of the capacitor and the metallized layer on the other sheet being the other electrode. The two sheets are offset from each other so that at each end of the roll the edge of one sheet extends beyond the edge of the other sheet. The electrical contact to the two electrodes is made by way of the protruding edge of each electrode at opposite ends of the roll.

Molten zinc or lead-tin solder is then sprayed onto the ends of the roll (a process called Schooping) to establish electrical contact with the metallized layer. A connecting lead is either welded or soldered to the relatively thick contact material. The zinc or solder Schooping apparently enters between the metallized plastic sheets and may melt a portion of the sheet to make mechanical and electrical contact to the thin metallized layer on the sheet.

It is preferred to have a layer of polymerized acrylate overlying the metallized layer of the capacitor material. A layer of acrylate in the range of from about 0.1 to 1 micrometer thick has been found sufficient to prevent corrosion of a zinc electrode in a high humidity environment. Furthermore, the overlying layer of acrylate improves the scratch resistance of the metallized electrode. The electrode may be abraded during slitting of the metallized sheet or winding a capacitor. An overlying acrylate layer effectively prevents damage from such scratching. The overlying layer of acrylate also helps confine the tiny arc that occurs adjacent to a short, which increases its temperature for more efficiently evaporating the metal from around the shorted area. This, and the presence of oxygen in the acrylate material, enhance the self-healing of the capacitor.

FIG. 9 illustrates in a fragmentary transverse cross section a few layers of a preferred capacitor. Each of the layers of the capacitor comprises a substrate sheet 56 having a metallized layer 57 on one face. A layer 58 of polymerized acrylate is deposited over each metallized layer. A second acrylate layer 59 may be deposited on the opposite face of each dielectric sheet 56 for isolating the sheet from dielectric capacitor liquid. A metal contact electrode 60 is sprayed onto each end of the roll of metallized sheets.

The edges of the two sheets forming the capacitor are offset from each other. Thus, at one end of the capacitor, the edge of one sheet A extends beyond the edge of the intervening sheet B which is recessed. At the opposite end of the capacitor the recessed sheet B extends beyond the edge of the interleaved sheet A. This permits electrical contact to be made to the metallized layers on the respective sheets at opposite ends of the capacitor.

In this embodiment the metallized layer on each sheet extends to one edge of the sheet and does not extend all the way to the opposite edge of the sheet.

Thus, for example, as illustrated at the left edge of FIG. 9, the metallized layer extends all the way to the edge of the protruding sheets A. On the other hand, the metallized layer on the recessed sheets B stop short of the edge of the sheet. Because of this, when the contact metal 60 is sprayed onto the end of the roll, electrical contact can be made to the metallized layer on the protruding sheet and the metallized layer on the recessed sheet is electrically insulated by the plastic material.

Surprisingly, despite the substantially complete enclosure of the metallized layer by acrylate and polypropylene plastic, good electrical contact is made when the electrical contact is sprayed onto the end of the roll. It is believed that a small amount of thermoplastic dielectric sheet melts, thereby assuring good electrical contact with the metallized layer. Polypropylene has a melting temperature of about 165°C, and the cross linked acrylate does not melt. The metallized layer is, in effect, supported by the polymerized acrylate which resists higher temperatures.

Claims

1. A method for forming a substrate coated with an acrylate layer comprising the steps of:
 - chilling a substrate to a temperature below ambient temperature outside of a deposition station;
 - passing the chilled substrate through a deposition station while the substrate is still at a temperature below ambient temperature;
 - at the deposition station:
 - evaporating an acrylate monomer having an average molecular weight in the range of from 150 to 600, and
 - condensing the acrylate monomer on the substrate as a acrylate film; and
 - polymerizing the acrylate film for forming a polymerized acrylate layer.
2. A method according to claim 1 wherein the substrate comprises a flexible sheet and comprising the steps of:
 - engaging a face of the flexible sheet with a chilled roller; and depositing the acrylate on the same face that engaged the chilled roller.
3. A method according to either one of claims 1 or 2 wherein the substrate comprises a plastic film and comprising the steps of:
 - chilling a roll of plastic film,
 - unrolling the plastic film,
 - engaging the plastic film with a chilled drum,
 - and
 - rotating the drum past the deposition station.

engaging a first face of the sheet with a chilled roller;
 thereafter engaging the other face of the sheet with a chilled drum; and
 rotating the drum past the deposition station for depositing acrylate on the first face.

5. A method for forming a flexible sheet substrate coated with an acrylate layer comprising the steps of:
 - engaging a face of the flexible sheet with a chilled roller;
 - evaporating an acrylate monomer in a vacuum system;
 - condensing the acrylate as an acrylate film on the same face of the substrate that was engaged by the chilled roller; and
 - polymerizing the acrylate film for forming a polymerized acrylate layer.
6. A method for forming a substrate coated with an acrylate layer comprising the steps of:
 - preheating a polyfunctional acrylate prepolymer to a temperature above ambient temperature and lower than a temperature where the prepolymer polymerizes;
 - atomizing the preheated prepolymer into a heated vaporization chamber in a vacuum system;
 - vaporizing the prepolymer in the vaporization chamber and discharging the vaporised prepolymer into the vacuum system;
 - depositing the prepolymer on a substrate; and
 - polymerizing the acrylate prepolymer for forming a crosslinked acrylate layer.
7. A method according to any one of the preceding claims wherein the acrylate is a blend of acrylate monomers comprising at least one monomer having a molecular weight in the range of from 150 to 400 and an acrylate having a molecular weight of more than 600.
8. A wound capacitor comprising:
 - at least one thermoplastic dielectric sheet wound into a cylinder;
 - a metallized conductive layer deposited on at least one face of the dielectric sheet;
 - a layer of crosslinked acrylate in direct contact with the entire metallized layer; and
 - an electrical contact made to the conductive layer at an end of the cylinder by Schooping.
9. A capacitor according to claim 7 wherein the acrylate layer overlies the entire metallized layer.

second layer of crosslinked acrylate deposited over
the conductive layer.

5

10

15

20

25

30

35

40

45

50

55

10

Fig. 1

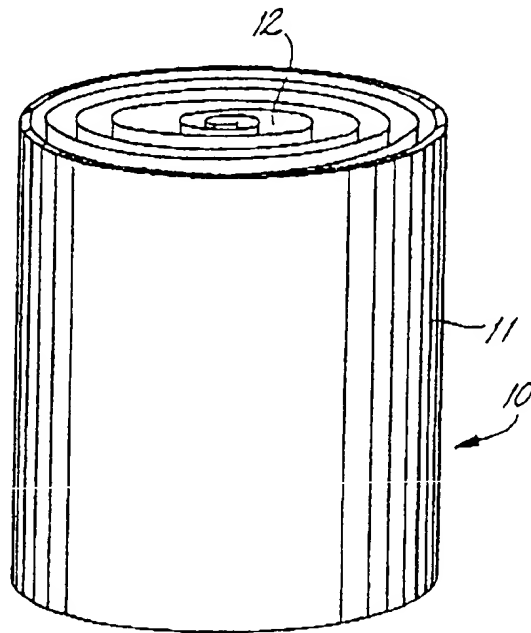


Fig. 2a

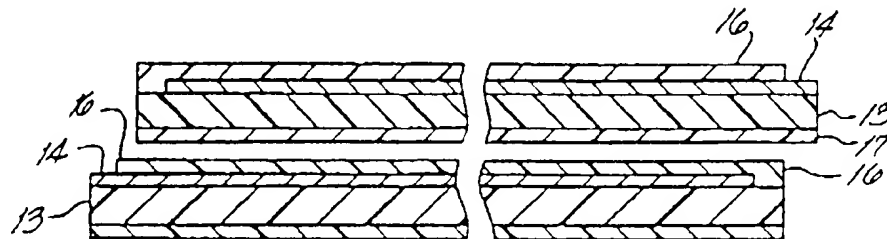


Fig. 2b



Fig. 2c

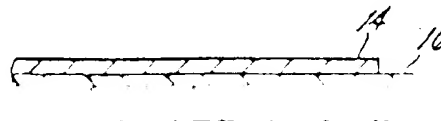


Fig. 3

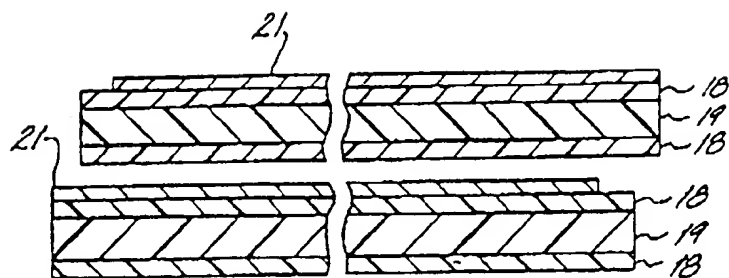


Fig. 4

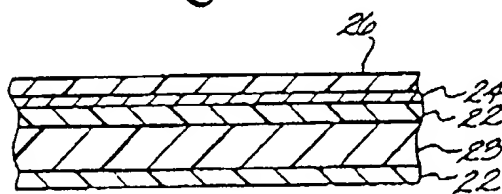
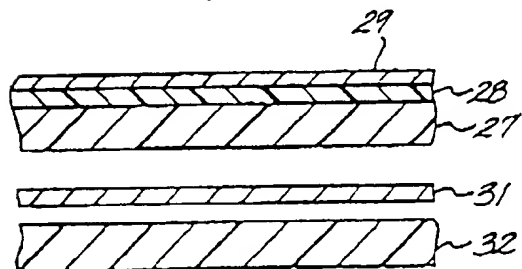


Fig. 5



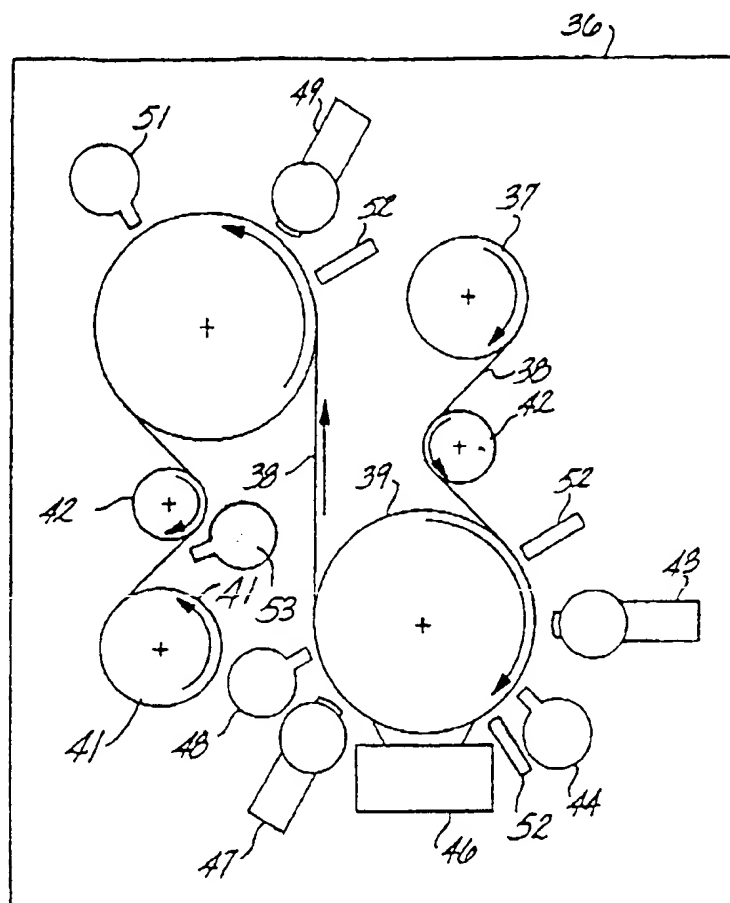


Fig. 6

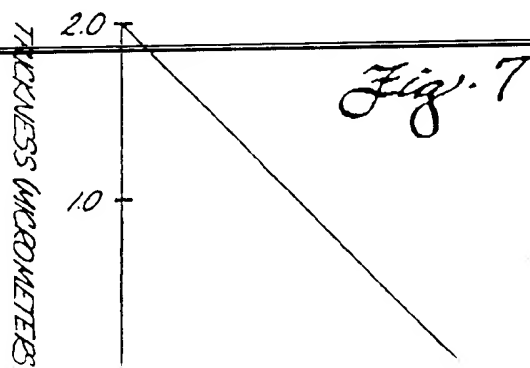


Fig. 7

Fig. 8

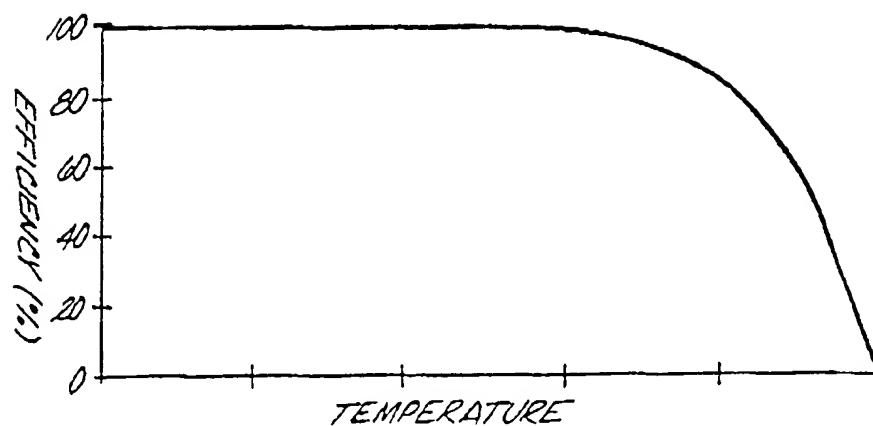


Fig. 9

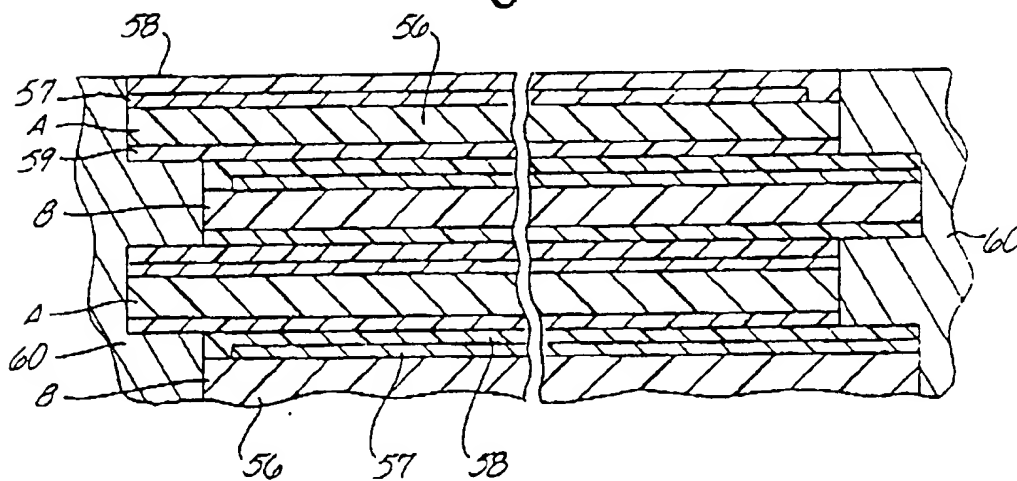


Fig. 10

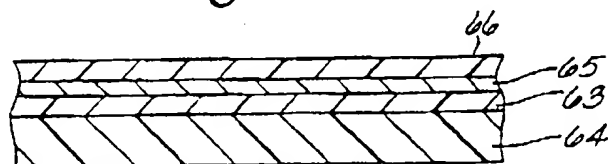


Fig. 11

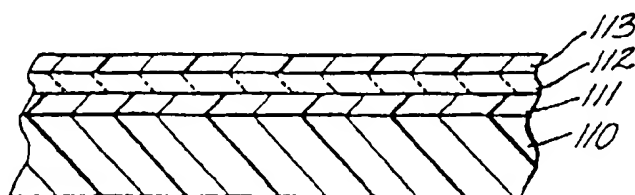


Fig. 12

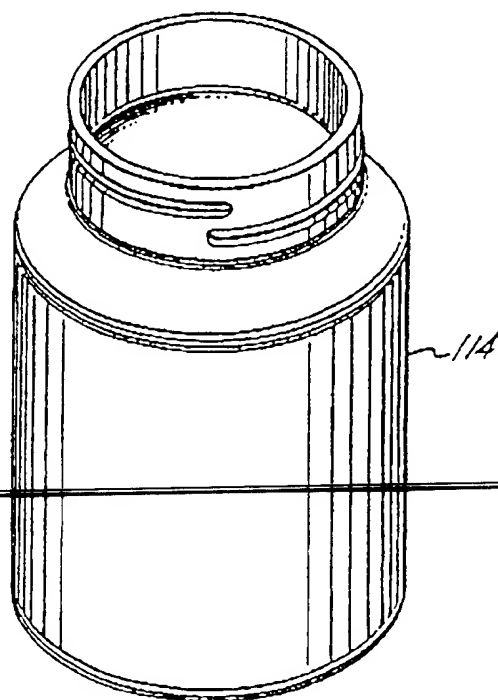


Fig. 13


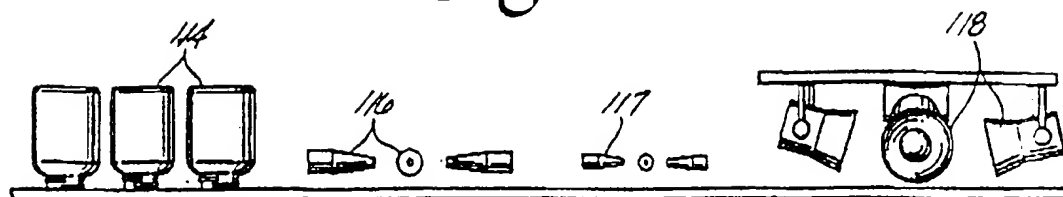


Fig. 14



(19)

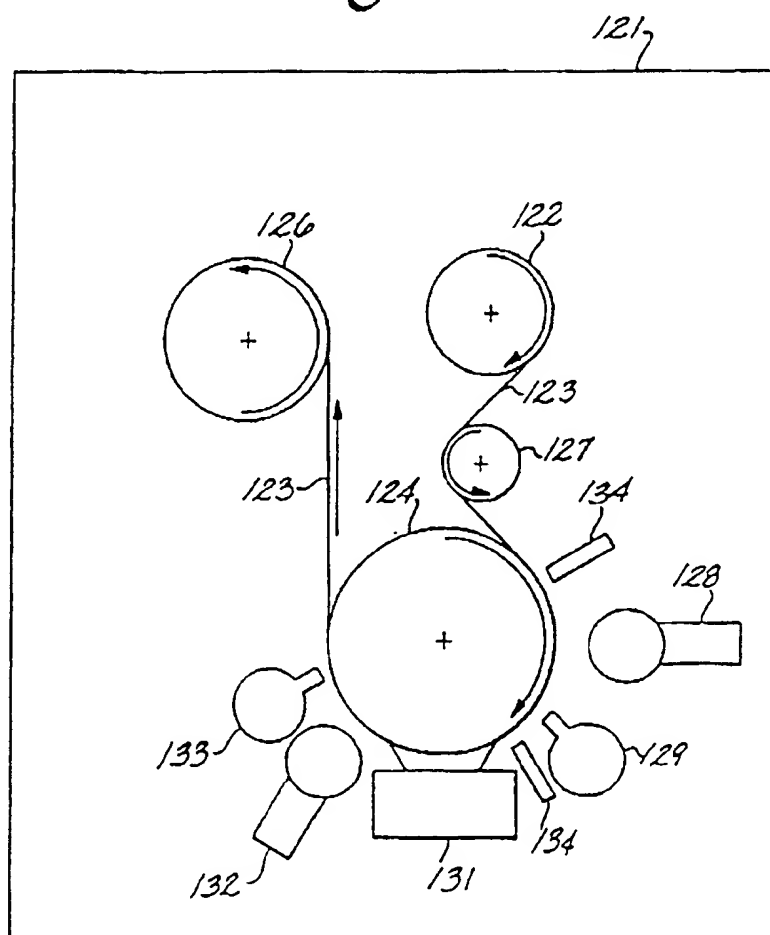

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 722 787 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
04.06.1997 Bulletin 1997/23

(51) Int. Cl.⁶: **B05D 7/24**, B05D 7/04,
H01G 4/14

(43) Date of publication A2:
24.07.1996 Bulletin 1996/30

(21) Application number: **96200813.2**

(22) Date of filing: **04.10.1994**

(84) Designated Contracting States:
AT CH DE ES FR GB IT LI

(30) Priority: **04.10.1993 US 131328**
15.04.1994 US 228579

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
94930583.3 / 0 758 482

(71) Applicant: **CATALINA COATINGS, INC.**
Tucson, AZ 85745 (US)

(72) Inventors:

- **Shaw, David G.**
Tucson, Arizona 85718 (US)
- **Dawson, Eric**
Tucson, Arizona 85741 (US)
- **Cline, Daniel**
Tucson, Arizona 85745 (US)
- **Langlois, Marc**
Tucson, Arizona 85718 (US)

(74) Representative: **Enskat, Michael Antony Frank**
Saunders & Dolleymore,
9, Rickmansworth Road
Watford, Hertfordshire WD1 7HE (GB)

(54) **Process for making an acrylate coating**

(57) Sheet material is given low oxygen permeability or prepared for winding high voltage capacitors by evaporating polyfunctional acrylate monomer having a molecular rate in the range of from 150 to 600 and condensing the acrylate as a monomer film on a dielectric or thermoplastic substrate. The acrylate is polymerized by irradiation by ultraviolet or electrons. A metallized layer provides an electrode of a capacitor. Electrical contact can be made to the metal layer by Schooping even though the metallized layer is covered by a layer of acrylate. A material selected from the group consisting of silicon oxide, silicon nitride, aluminum nitride, titanium nitride, aluminum oxide and metal may be deposited for forming an oxygen barrier. Adhesion is enhanced by plasma treatment of a surface immediately before deposition. Condensation efficiency is also enhanced by chilling the substrate on which the acrylate is condensed.

EP 0 7 22 787 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 96 20 0813

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|---|---|---|--|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int.Cl.6) |
| X | US 4 842 893 A (YIALIZIS ANGELO ET AL) 27 June 1989 * column 3, line 25 - line 35 * * column 4, line 47 - line 55; claims * ----- | 1 | B05D7/24 B05D7/04 H01G4/14 |
| | | | TECHNICAL FIELDS SEARCHED (Int.Cl.6) |
| | | | B05D |
| The present search report has been drawn up for all claims | | | |
| Place of search THE HAGUE | | Date of completion of the search 5 December 1996 | Examiner BROTHIER, J |
| <p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document</p> | | | |

EPO FORM 1503 01.92 (P04C01)



European Patent Office

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims

- ☐ All claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claims:
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions, namely:

See sheet -B-

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☒ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims 1 and 2.



European Patent Office

EP96200813 - B -

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions, namely:

Subject 1: (searched): claims 1-5, 7 (if dependent of claims 1-5): Method for making an acrylate coating by chilling the substrate, evaporating an acrylate monomer, condensing the monomer on the substrate and polymerizing the monomer coating.

Subject 2: (not searched): claims 6 and 7 (if dependent of claim 6) Method for forming an acrylate coating comprising the steps of preheating a polyfunctional acrylate prepolymer, atomizing the preheated prepolymer, vaporizing the prepolymer in the vaporization chamber depositing the prepolymer on the substrate and polymerizing the acrylate prepolymer.

Subject 3: (not searched): claims 8-10: Wound capacitor comprising: at least one thermoplastic dielectric sheet wound into a cylinder, a metallized conductive layer deposited at least on one surface of the dielectric sheet, a layer of crosslinked acrylate in direct contact with the entire metallized layer and an electrical contact made to the conductive layer by Shoothing.